


Setting Up the Remote Control

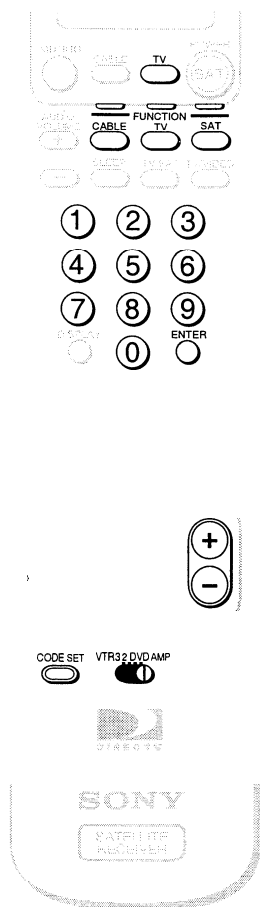

The RM-Y139 and RM-Y802 remote controls can be programmed to operate your other audio/video equipment.

1 Find the code(s) for the manufacturer of the device you want to operate with this remote control.

You can find these codes on pages 66 and 67.

2 Press the CODE SET button.

All function indicators begin flashing.




3 Press the FUNCTION button for the device you want to operate with this remote control.

The function indicator for only that device begins flashing. You can set up the RM-Y802 remote control to operate extra devices by sliding the device switch to VTR3, 2, DVD, or AMP and pressing the CABLE FUNCTION button.



4 Press the 0-9 buttons to input the manufacturer code, then press the ENTER button.

The function indicator goes off, and the remote is setup to operate that device.



5 Test the remote control.

Press the POWER button for that equipment, then press other operation controls such as the CH +/- buttons. If the device does not respond to the remote control, repeat from step 2 and enter a different manufacturer code in step 4.

Tip

Remember to aim the remote control at the device you are trying to operate.

Manufacturer Codes

TV Codes

Manufacturer	Code
Sony	101
Admiral (M. Wards)	102,114, 109
ABC	112
Bell & Howell (M. Wards)	114, 109, 138
Broksonic	103,112
Craig	122, 123, 120, 121
Croslex	111
Curtis Mathis	103,119, 123
Daewoo	135,136,103
Daytron	113
Emerson	122,113,120,121,123,103,115
Fisher	125
General Electric	102, 118, 103, 107
Goldstar	103,113, 112,130
Hitachi	131, 113, 103, 132
JC Penney	103, 102, 130, 107
JVC	128,129
KTV	133, 113, 103, 123, 134
LXI (Sears)	102,103 111, 125, 119, 112
Magnavox	111, 112, 113, 107
Mitsubishi/MGA	124, 103, 112
NEC	103,112
Panasonic	118, 116, 117, 107
Philco	111, 118, 109
Philips	111
Pilot	103
Pioneer	137, 118, 119
Portland	103,108
Quasar	110,107
Radio Shack	102,112, 124, 123
RCA/Proscan	102, 103, 104, 105,106, 107, 108
Samsung	126, 112, 113, 103
Sanyo	125
Scott	123, 112
Sharp	114,113, 115
Signature 2000 (M. Wards)	114,109
Sylvania	111, 112, 108
Symphonic	123,139
Tenika	109
Toshiba	119,114
Videch	131, 103, 112
Wards	113, 103, 115, 112
Zenith	108,110

VCR Codes

Manufacturer	Code
Sony	300, 301,302, 303
Aiwa	338
Audio Dynamic	314,347
Bell & Howell (M. Wards)	330,343
Broksonic	317,319
Canon	309,308
Citizen	332
Craig	315,302, 332
Curtis Mathis	304,338, 309
Daewoo	341,312, 309
DBX	314,336, 337
Dimensia	304
Emerson	319, 320, 316, 317, 318, 341
Fisher	330,334, 335, 333
Funai	338
General Electric	329, 304, 309
Go Video	322, 339, 340
Goldstar	332
Hitachi	306, 304, 305, 338
HQ	315
Instant Replay	309,308
JC Penney	309, 305, 304, 330, 314, 336, 337
JVC	314, 336, 337
Kenwood	314, 336, 332, 337
LXI (Sears)	332, 305, 333, 334, 330, 335, 338
Magnavox	310, 308, 309
Marantz	314, 336, 337
Marta	332
Memorex	309,335
Minolta	305,304
Mitsubishi/MGA	323, 324, 325, 326
Multitech	325, 338, 321
NEC	314, 336, 337
Olympic	309,308
Optimus	327
Panasonic	308, 309, 306, 307
Pentax	305,304
Philco	308,309
Philips	310, 308, 309
Pioneer	308
Quasar	306, 308, 309
RCA/Proscan	304,305, 308, 309, 310, 311, 312,313

VCR Codes (continued)

Manufacturer	Code
Realistic	309, 330, 328, 335, 324, 338
Sansui	314
Singer	315
Samsung	322, 313, 321
Sanyo	330,335
Scott	312, 313, 321, 335, 323, 324, 325,326
Sharp	327, 325, 328
Shintom	315
Signature 2000 (M. Wards)	336,327
Sylvania	310, 308, 309, 338
Symphonic	338
Tashiro	332
Tatung	314, 336, 337
Teac	314, 336, 338, 337
Technics	309,308
Teknika	338,342
Toshiba	312,311
Wards	327.328.335.331.332
Yamaha	330, 314, 336, 337
Zenith	331

DVD Codes (SAT-A50 Only)

Manufacturer	Code
Sony	601
Panasonic	604
Pioneer	605
RCA	602
Toshiba	603

AMP (Amplifier) Codes (SAT-A50 Only)

Manufacturer	Code
Sony	501
Denon (Sharp)	516, 517, 518
Harmon	519
JVC	506, 507, 508
Kenwood	504,505
McIntosh	520
Onkyo	512,513
Pioneer	502,503
Technics	509,510,511
Yamaha	514,515

Cable Box Codes (SAT-A50 Only)

Manufacturer	Code
Hamlin/Regal	222, 223, 224, 225, 228
Jerrold/G.I.	201, 202, 203. 204, 205, 206, 207 208.218
Oak	227, 228, 229
Panasonic	219, 220, 221
Pioneer	214,215
Scientific Atlanta	209. 210.211
Tocom	216,217
Zenith	212